



Technical datasheet

EDR 24TC40



Brand	EREA
Article Number	EDR 24TC40
EAN-code Barcode	5414503003362
Code	2220
Product type	Single-phase control transformer
Primary Voltage	15-0-230-400V AC
Secondary Voltage	0-0-24V AC
Power	40 VA
Standards	EN 61558-2-2 EN 61558-2-6 EN 60742

General properties

Applications	For all applications, especially designed for inrush power in	Maximum ambient temperature ta	50 °C
Protection class	Prepared for protection class II	Temperature class transfo	B
Degree of protection	IP20	Finishing	Vacuum-encapsulated with synthetic resin

Electrical properties


Frequency	50-60 Hz	Efficiency	87 %
Po	3,3 W	Pcu	3 W
Dielectric Strength	4500 Vac	Insulation resistance	200 MΩ
Dielectric strength referred to frame	-	Specific property	-
Voltage drop (dU%)	6,3 %	Short-circuit voltage (Ucc %)	5,7 %

Mechanical properties

Primary connection	Screw terminals 4 mm ²
Secondary connection	Screw terminals 4 mm ²
Fixation	DIN-rail mounting

Dimensions/weight

Dimensions AxBxC	80x70x96 mm
Dimension D	67 mm
Dimension E	56 mm
Dimension Φ	5 mm
Weight	2 kg

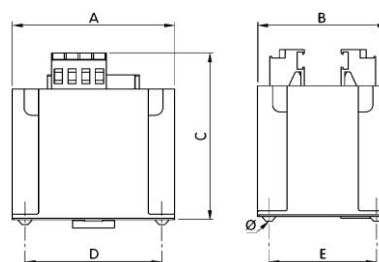

rev. 18.11.2020

