



# Technical datasheet

## SPT16000/D/500



Brand	EREA
Article Number	SPT16000/D/500
EAN-code Barcode	5414503123619
Code	12361
Product type	Three-phase separating transformer
Primary Voltage	3x 500V Δ
Secondary Voltage	3 x 230V Δ -- 3x 400V Y+N
Power	16 000 VA
Standards	EN 60726   EN 60076

### General properties

Applications	For industrial applications	Maximum ambient temperature ta	40 °C
Protection class	Prepared for protection class I	Temperature class transfo	F
Degree of protection	IP00	Finishing	Vacuum- and pressure- varnish impregnated

### Electrical properties

Frequency	50-60 Hz	Efficiency	95,2 %
Po	112 W	Pcu	695 W
Dielectric Strength	4500 Vac	Insulation resistance	200 MΩ
Dielectric strength referred to frame	2500 Vac	Specific property	Primary delta connected, secondary not connected
Voltage drop (dU%)	4,3 %	Short-circuit voltage (Ucc %)	-
Recommended fuse PRI	D32A/C63A ( 3x500V Δ )	Recommended fuse SEC	C40A ( 3x230V Δ ) C25A ( 3x400V Y+N )

### Mechanical properties


Primary connection	Screw terminals 10 mm <sup>2</sup>
Secondary connection	Screw terminals 10 mm <sup>2</sup>
Fixation	Supports with fixing holes

### Protection case

Housing IP20	U 2222720
Housing IP23	K23EI400/005
Housing IP44	K44EI400/010

### Dimensions/weight



Dimensions AxBxC	480x200x415 mm
Dimension D	320 mm
Dimension E	160 mm
Dimension Φ	11 mm
Weight	85 kg







## Connection diagram SPT16000/D/500

**3x 500V Δ → 3 x 230V Δ**

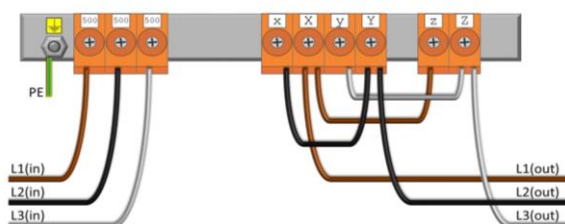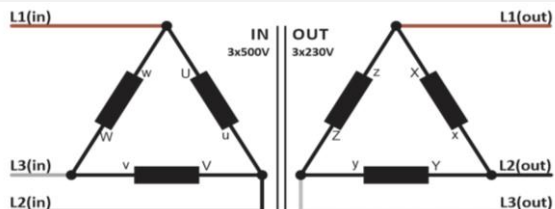

**3x 500V Δ → 3x 400V Y+N**

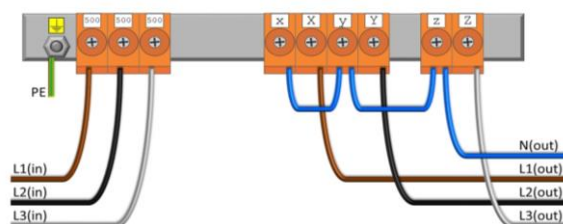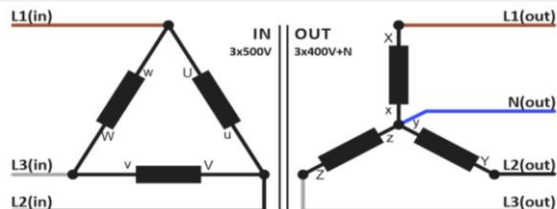



## Accessories SPT16000/D/500

IP20 housing

**U 2222720**



IP23 housing

**K23EI400/005**



Vibration damper

(4 pieces needed per transformer)

**Silent block 50**

