



Technical datasheet

SPT25000/D/500



Brand	EREA
Article Number	SPT25000/D/500
EAN-code Barcode	5414503123633
Code	12363
Product type	Three-phase separating transformer
Primary Voltage	3x 500V Δ
Secondary Voltage	3 x 230V Δ -- 3x 400V Y+N
Power	25 000 VA
Standards	EN 60726 EN 60076

General properties

Applications	For industrial applications	Maximum ambient temperature ta	40 °C
Protection class	Prepared for protection class I	Temperature class transfo	F
Degree of protection	IP00	Finishing	Vacuum- and pressure- varnish impregnated

Electrical properties

Frequency	50-60 Hz	Efficiency	96,5 %
Po	175 W	Pcu	720 W
Dielectric Strength	4500 Vac	Insulation resistance	200 MΩ
Dielectric strength referred to frame	2500 Vac	Specific property	Primary delta connected, secondary not connected
Voltage drop (dU%)	2,7 %	Short-circuit voltage (Ucc %)	-
Recommended fuse PRI	D50A/C100A (3x500V Δ)	Recommended fuse SEC	C63A (3x230V Δ) C40A (3x400V Y+N)

Mechanical properties


Primary connection	Nut fixing M8
Secondary connection	Nut fixing M8
Fixation	Supports with fixing holes

Protection case

Housing IP20	U 2222720
Housing IP23	K23EI400/003
Housing IP44	K44EI400/020

Dimensions/weight



Dimensions AxBxC	480x290x415 mm
Dimension D	320 mm
Dimension E	190 mm
Dimension Φ	11 mm
Weight	119 kg

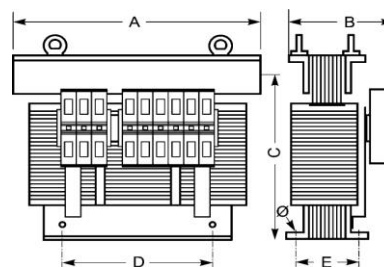





Connection diagram SPT25000/D/500

3x 500V Δ → 3 x 230V Δ

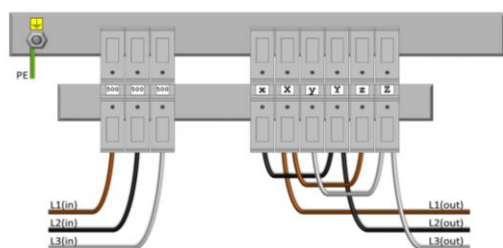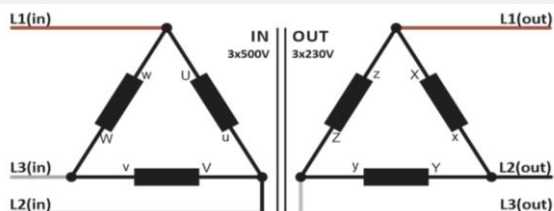

3x 500V Δ → 3x 400V Y+N

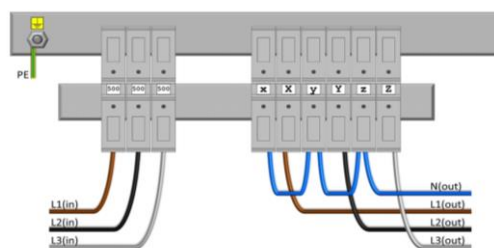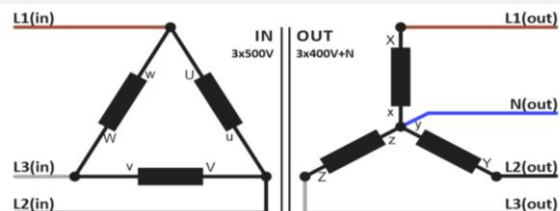



Accessories SPT25000/D/500

IP20 housing

U 2222720



IP23 housing

K23EI400/003



Vibration damper

(4 pieces needed per transformer)

Silent block 50



rev. 02.08.2021