



Technical datasheet

SPT63000/D/480



Brand	EREA
Article Number	SPT63000/D/480
EAN-code Barcode	5414503126429
Code	12642
Product type	Three-phase separating transformer
Primary Voltage	3x 480V Δ
Secondary Voltage	6 x 230V Δ -- 3x 400V Y+N
Power	63000 VA
Standards	EN 60726 EN 60076

General properties

Application	For industrial applications	Finishing	Vacuum- and pressure- varnish impregnated
Protection class	Prepared for protection class I	Maximum ambient temperature ta	40 °C
Degree of protection	IP00	Temperature class transfo	F

Electrical properties

Frequency	50-60 Hz	Efficiency η (regime)	97,7 %
No-load Loss Po	376 W	Full-load losses Pcu (regime)	1101 W
Dielectric Strenght PRI-SEC	4500 Vac	Insulation resistance	200 MΩ
Dielectric strength vs. frame	2500 Vac	Specific properties	Primary delta connected, secondary not connected
Voltage drop ΔU	1,79 %	Short-circuit voltage Ucc	-
Recommended fuse PRI	D125A (3x500V Δ)	Recommended fuse SEC	MCCB160A (3x230V Δ) C100A (3x400V Y+N)

Mechanical properties


Primary connection	Nut fixing M10
Secondary connection	Nut fixing M10
Fixation	Supports with fixing holes

Protection case

Housing IP20	U 2222723
Housing IP23	K23EI500/002
Housing IP44	K44EI500/010



Dimensions/weight

Dimensions AxBxC	640x385x500 mm
Dimension D	400 mm
Dimension E	210 mm
Dimension Φ	11 mm
Weight	250 kg


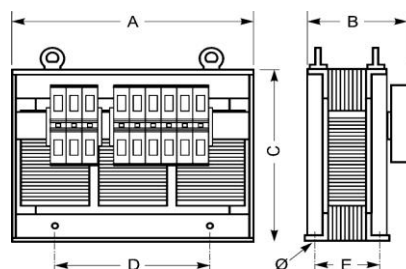


Connection diagram SPT63000/D/480

3x 480V Δ $\rightarrow$ 3x 230V Δ

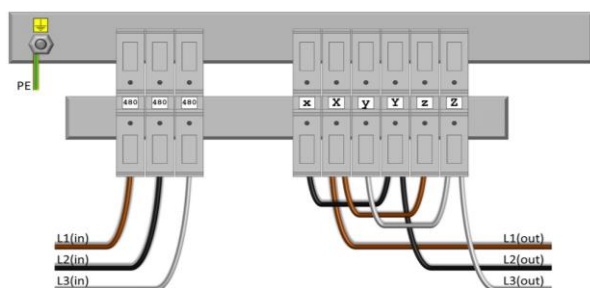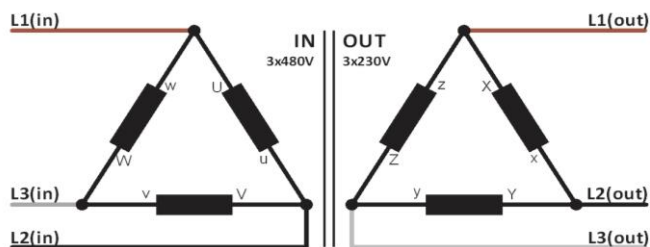

3x 480V Δ $\rightarrow$ 3x 400V Y+N

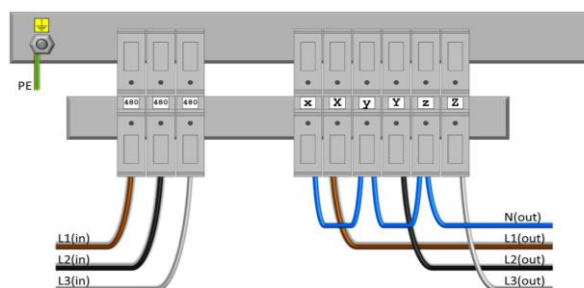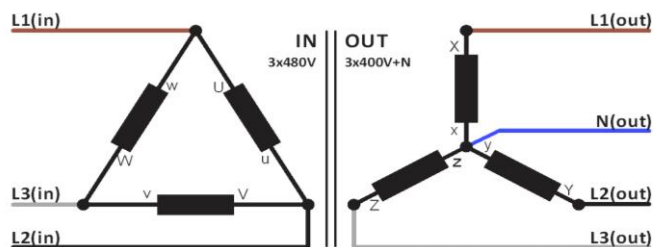



Accessories SPT63000/D/480

IP20 housing

U 2222723




IP23 housing

K23EI500/002



IP44 housing

K44EI500/010



Vibration damper

(4 pieces per transformer)

Silent block 75



rev. 10.12.2024