



# Technical datasheet

## SPT63000/D/500



Brand	EREA
Article Number	SPT63000/D/500
EAN-code Barcode	5414503123671
Code	12367
Product type	Three-phase separating transformer
Primary Voltage	3x 500V Δ
Secondary Voltage	3 x 230V Δ -- 3x 400V Y+N
Power	63 000 VA
Standards	EN 60726   EN 60076

### General properties

Applications	For industrial applications	Maximum ambient temperature ta	40 °C
Protection class	Prepared for protection class I	Temperature class transfo	F
Degree of protection	IP00	Finishing	Vacuum- and pressure- varnish impregnated

### Electrical properties

Frequency	50-60 Hz	Efficiency	97,7 %
Po	376 W	Pcu	1101 W
Dielectric Strength	4500 Vac	Insulation resistance	200 MΩ
Dielectric strength referred to frame	2500 Vac	Specific property	Primary delta connected, secondary not connected
Voltage drop (dU%)	1,79 %	Short-circuit voltage (Ucc %)	-
Recommended fuse PRI	D125A ( 3x500V Δ )	Recommended fuse SEC	MCCB160A ( 3x230V Δ )   C100A ( 3x400V Y+N )

### Mechanical properties


Primary connection	Nut fixing M10
Secondary connection	Nut fixing M10
Fixation	Supports with fixing holes

### Protection case

Housing IP20	U 2222723
Housing IP23	K23EI500/002
Housing IP44	K44EI500/010

### Dimensions/weight



Dimensions AxBxC	640x385x500 mm
Dimension D	400 mm
Dimension E	210 mm
Dimension Φ	11 mm
Weight	250 kg

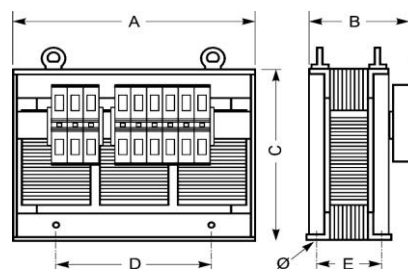





## Connection diagram SPT63000/D/500

**3x 500V Δ → 3 x 230V Δ**

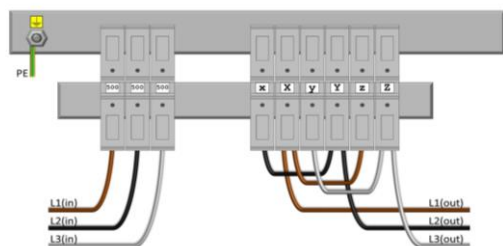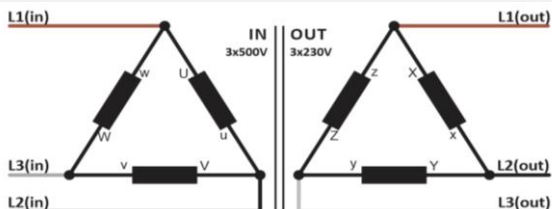

**3x 500V Δ → 3x 400V Y+N**

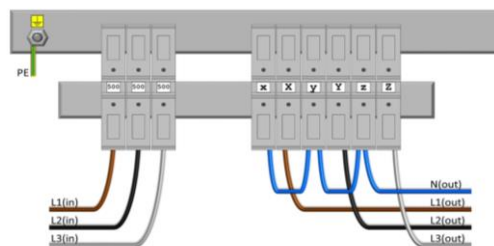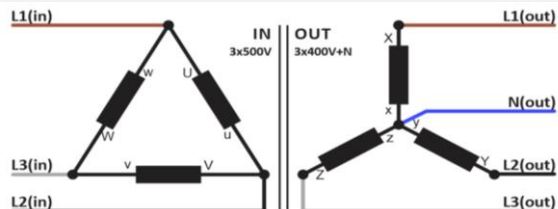



## Accessories SPT63000/D/500

IP20 housing

**U 2222723**



IP23 housing

**K23EI500/002**



Vibration damper

(4 pieces needed per transformer)

**Silent block 75**



rev. 02.08.2021